



HEWLETT  
PACKARD



Electro Rent  
Corporation

**300 WATT ELECTRONIC LOAD MODULE  
HP MODEL 60502A**

**FOR MODULES WITH SERIAL NUMBERS:  
3031A-01315 AND ABOVE**

## 300-Watt Module

---

### About This Manual

This manual provides information for the HP 60502A 300-Watt Electronic Load Module. It is designed as a supplement to the the HP 6050A/6051A Multiple Input Electronic Load Operating Manual (part number 06050-90001). Four tables provide the following module-specific information:

Table 60502-1 provides detailed specifications.

Table 60502-2 lists the ranges that can be programmed in constant current, constant resistance, and constant voltage modes. It shows the maximum and minimum programming values for each range. Refer to this table when programming the module locally as described in chapter 4, or remotely as described in chapter 5 of the operating manual.

Table 60502-3 gives the factory default values of the module. Unless you have saved your own wake-up settings, the module will be set to the factory default values whenever power is applied. See chapter 4 in the operating manual.

Table 60502-4 provides calibration information for the module. This information is needed to perform the annual calibration procedure described in chapter 6 of the operating manual.

---

### Module Installation and Operation

Except for the module-specific information in this manual, all installation, operation, and calibration instructions are given in the Electronic Load Operating Manual. The HP Electronic Load Family Programming Reference Manual (part number 06060-90005) contains complete programming details that apply to all Electronic Load models.

---

#### Note



The following information in chapter 2 of the Electronic Load Operating Manual does not apply to electronic load modules with the serial numbers listed on the title page of this manual: The section titled "Extended Power Operation", and the section titled "Extended Power Limit". Also for these modules, change the 3-second delay referred to under "Nominal Power Limit" to 50 milliseconds.

---

---

### Items Supplied

In addition to this manual, a 10-pin connector plug is also shipped with your Electronic Load module. Refer to chapter 3 in the operating manual for more information.


**Table 60502-1. Specifications**  
**(Specifications apply for 25°C ±5°C, except as noted)**

**DC Input Rating:**


**Current:** 0 to 60 A

**Voltage:** 3 V to 60 V (minimum dc operation from 0 to 2 V for 0 to 60 A)

**Power:** 300 W at 40°C (derated to 225 W at 55°C)

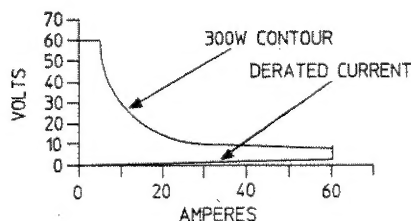

A. OPERATING CHARACTERISTICS

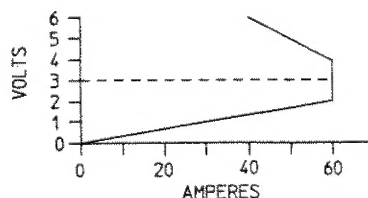

B. DERATED CURRENT DETAIL

**Constant Current Mode:**

**Ranges:** 0 to 6 A; and 0 to 60 A

**Accuracy:** (after 30 second wait):  $\pm 0.1\%$   $\pm 75$  mA (both ranges)

**Resolution:** 1.6 mA (6 A range); 16 mA (60 A range)

**Regulation:** 10 mA (both ranges)

**Temperature Coefficient:** 100 ppm/°C  $\pm 5$  mA/°C (both ranges)

**Constant Resistance Mode:**

**Ranges:** 0.033 to 1  $\Omega$ ; 1  $\Omega$  to 1 k $\Omega$ ; and 10  $\Omega$  to 10 k $\Omega$

**Accuracy:**  $\pm 0.8\%$   $\pm 8$  m $\Omega$  with  $\geq 6$  A at input (1  $\Omega$  range);

$\pm 0.3\%$   $\pm 8$  mS with  $\geq 6$  V at input (1 k and 10 k $\Omega$  ranges)

**Resolution:** 0.27 m $\Omega$  (1  $\Omega$  range); 0.27 mS (1 k $\Omega$  range); 0.027 mS (10 k $\Omega$  range)

**Regulation:** 10 mV with remote sensing (1  $\Omega$  range); 10 mA (1 k and 10 k $\Omega$  ranges)

**Temperature Coefficient:** 800 ppm/°C  $\pm 0.4$  m $\Omega$ /°C (1  $\Omega$  range);

300 ppm/°C  $\pm 0.6$  mS/°C (1 k and 10 k $\Omega$  ranges)

**Constant Voltage Mode:**

**Range:** 0 to 60 V

**Accuracy:**  $\pm 0.1\%$   $\pm 50$  mV

**Resolution:** 16 mV

**Regulation:** 10 mV (remote sense); 40 mV (local sense)

**Temperature Coefficient:** 100 ppm/°C  $\pm 5$  mV/°C

**Transient Operation:**

**Continuous Mode**

**Frequency Range:** 0.25 Hz to 10 kHz

**Frequency Resolution:** 4%

**Frequency Accuracy:** 3%

**Table 60502-1. Specifications (continued)**

**Continuous Mode (continued)**

**Duty Cycle Range:** 3% to 97% (0.25 Hz to 1 kHz); 6% to 94% (1 kHz to 10 kHz)

**Duty Cycle Resolution:** 4%

**Duty Cycle Accuracy:** 6% of setting  $\pm 2\%$

**Pulsed Mode**

**Pulse Width:** 50  $\mu\text{s}$   $\pm 3\%$  minimum; 4 s  $\pm 3\%$  maximum

**Transient Current Level (0 to 6 A and 0 to 60 A ranges):**

**Resolution:** 26 mA (6 A range); 260 mA (60 A range)

**Accuracy:**  $\pm 0.1\% \pm 80$  mA (6 A range);  $\pm 0.1\% \pm 350$  mA (60 A range)

**Temperature Coefficient:** 100 ppm/ $^{\circ}\text{C}$   $\pm 7$  mA/ $^{\circ}\text{C}$

**Transient Resistance Level (0.033 to 1  $\Omega$ , 1  $\Omega$  to 1 k $\Omega$ , and 10  $\Omega$  to 10k $\Omega$  ranges):**

**Resolution:** 4.3 m $\Omega$  (1  $\Omega$  range); 4.3 mS (1 k $\Omega$  range); 0.4 mS (10 k $\Omega$  range)

**Accuracy:**  $\pm 0.8\% + 8$  m $\Omega$  with  $\geq 6$  A at input (1  $\Omega$  range)

$\pm 0.3\% + 10$  mS with  $\geq 6$  V at input (1 k $\Omega$  range)

$\pm 0.3\% + 7$  mS with  $\geq 6$  V at input (10 k $\Omega$  range)

**Transient Voltage Level (0 to 60 V):**

**Resolution:** 260 mV

**Accuracy:**  $\pm 0.1\% \pm 300$  mV

**Temperature Coefficient:** 150 ppm/ $^{\circ}\text{C}$   $\pm 5$  mV/ $^{\circ}\text{C}$

**Programmable Slew Rate** (For any given input transition, the time required will be either the total slew time or a minimum transition time, whichever is longer. The minimum transition time increases when operating with input currents under 1 A. The following are typical values;  $\pm 25\%$  tolerance):

**Current Slew Rate:\***

Rate #	60 A Range Step	6 A Range Step	Transition Time
1	1 A/ms	0.1 A/ms	8.0 ms
2	2.5 A/ms	0.25 A/ms	3.2 ms
3	5 A/ms	0.5 A/ms	1.6 ms
4	10 A/ms	1 A/ms	800 $\mu\text{s}$
5	25 A/ms	2.5 A/ms	320 $\mu\text{s}$
6	50 A/ms	5 A/ms	160 $\mu\text{s}$
7	0.1 A/ $\mu\text{s}$	10 A/ms	80 $\mu\text{s}$
8	0.25 A/ $\mu\text{s}$	25 A/ms	32 $\mu\text{s}$
9	0.5 A/ $\mu\text{s}$	50 A/ms	16 $\mu\text{s}$
10	1 A/ $\mu\text{s}$	0.1 A/ $\mu\text{s}$	12 $\mu\text{s}$
11	2.5 A/ $\mu\text{s}$	0.25 A/ $\mu\text{s}$	12 $\mu\text{s}$
12	5 A/ $\mu\text{s}$	0.5 A/ $\mu\text{s}$	12 $\mu\text{s}$

\*AC performance specified from 3 to 60 V.

**Table 60502-1. Specifications (continued)**

**Voltage Slew Rate:**

Rate #	Voltage Range Step	Transition Time*
1	1 V/ms	8.0 ms
2	2.5 V/ms	3.2 ms
3	5 V/ms	1.6 ms
4	10 V/ms	800 $\mu$ s
5	25 V/ms	320 $\mu$ s
6	50 V/ms	160 $\mu$ s
7	0.1 V/ $\mu$ s	85 $\mu$ s
8	0.25 V/ $\mu$ s	85 $\mu$ s
9	0.5 V/ $\mu$ s	85 $\mu$ s

\*Transition time based on low capacitance current source.

**Resistance Slew Rate (1  $\Omega$  range):** Uses the value programmed for voltage slew rate.

**Resistance Slew Rate (1 k and 10 k $\Omega$  ranges):** Uses the value programmed for current slew rate.

**Current Readback:**

**Resolution:** 17 mA (via HP-IB); 20 mA (front panel)

**Accuracy (after 30 second wait):**  $\pm 0.05\%$   $\pm 65$  mA

**Temperature Coefficient:** 50 ppm/ $^{\circ}$ C  $\pm 5$  mA/ $^{\circ}$ C

**Voltage Readback:**

**Resolution:** 17 mV (via HP-IB); 20 mV (front panel)

**Accuracy:**  $\pm 0.05\%$   $\pm 45$  mV

**Temperature Coefficient:** 50 ppm/ $^{\circ}$ C  $\pm 1.2$  mV/ $^{\circ}$ C

**Maximum Readback Capability:** 65 to 70 V (typical)

**Power Readback:**

**Accuracy:**  $\pm 0.2\%$   $\pm 4$  W

**External Analog Programming 0 to 10 V (dc or ac):**

**Bandwidth:** 10 kHz (3 db frequency)

**Accuracy:**  $\pm 4.5\%$   $\pm 75$  mA (0 to 6 A range)

$\pm 4.5\%$   $\pm 250$  mA (0 to 60 A range)

$\pm 0.8\%$   $\pm 200$  mV (0 to 60 V range)

**Temperature Coefficient:** 100 ppm/ $^{\circ}$ C  $\pm 6$  mA/ $^{\circ}$ C (current ranges)

100 ppm/ $^{\circ}$ C  $\pm 1$  mV/ $^{\circ}$ C (voltage range)

**External Current Monitor (0 to 10 V):**

**Accuracy:**  $\pm 4\%$   $\pm 85$  mA (referenced to analog common)

**Temperature Coefficient:** 50 ppm/ $^{\circ}$ C  $\pm 6$  mA/ $^{\circ}$ C

### Table 60502-1. Specifications (continued)

#### External Voltage Monitor (0 to 10 V):

Accuracy:  $\pm 0.25\% \pm 40$  mV (referenced to analog common)

Temperature Coefficient: 50 ppm/ $^{\circ}\text{C}$   $\pm 0.2$  mV/ $^{\circ}\text{C}$

Remote Sensing: 5 Vdc maximum between sense and input binding posts

#### Maximum Input Levels:

Current: 61.2 A (programmable to lower limits)

Voltage: 75 V

Minimum Operating Voltage: 2 V (derated to 0 V at 0 A)

Programmable Short Circuit:  $0.033 \Omega$  ( $0.02 \Omega$  typical)

Programmable Open Circuit:  $20 \text{ k}\Omega$  (typical)

#### Drift Stability (over an 8 hour interval):

Current:  $\pm 0.03\% \pm 10$  mA

Voltage:  $\pm 0.01\% \pm 10$  mV

#### PARD (20 Hz to 10 MHz noise):

Current: 4 mA rms/40 mA p-p

Voltage: 6 mV rms

DC Isolation Voltage:  $\pm 240$  Vdc between + or - input binding post and chassis ground

#### Digital Inputs:

Vlo: 0.9 V maximum at  $I_{lo} = -1$  mA

Vhi: 3.15 V minimum (pull-up resistor on input)

#### Digital Outputs:

Vlo: 0.72 V maximum at  $I_{lo} = 1$  mA

Vhi: 4.4 V minimum at  $I_{lo} = -20 \mu\text{A}$

Reverse Current Capacity: 100 A when unit is on; 40 A when unit is off

Weight: 3.2 kg (7 lbs.)

**Table 60502-2. Programming Ranges**

Function	Front Panel Key	Front Panel Display	HP-SL Command (Short Form)	Range of Values
<b>Constant Current</b>				
Set Range	<b>Range</b>	C:RNG value	"CURR:RANG value"	$\geq 0$ and $\leq 6$ A $> 6$ and $\leq 60$ A
Low Range				
High Range				
Set Main Level	<b>CURR</b>	CURR value	"CURR value"	0 to 6 A 0 to 60 A
Low Range				
High Range				
Set Slew Rate	(shift) <b>Slew</b>	C:SLW value	"CURR:SLEW value"	0.0001 to 0.5 (A/ $\mu$ s) 0.001 to 5 (A/ $\mu$ s)
Low Range				
High Range				
Set Transient Level	<b>Tran Level</b>	C:TLV value	"CURR:TLEV value"	same as main level
*Set Triggered Level			"CURR:TRIG value"	same as main level
<b>Constant Resistance</b>				
Set Range	<b>Range</b>	R:RNG value	"RES:RANG value"	$\geq 0$ and $\leq 1$ $\Omega$ $> 1$ $\Omega$ and $\leq 1$ k $\Omega$ $> 1$ k $\Omega$ and $\leq 10$ k $\Omega$
Low Range				
Middle Range				
High Range				
Set Main Level	<b>RES</b>	RES value	"RES value"	0 to 1 $\Omega$ 1 $\Omega$ to 1 k $\Omega$ 10 $\Omega$ to 10 k $\Omega$
Low Range				
Middle Range				
High Range				
Set Slew Rate	(shift) <b>Slew</b>	V:SLW value C:SLW value	"VOLT:SLEW value" "CURR:SLEW value"	same as voltage slew same as current slew
Low Range				
Middle/High Range				
Set Transient Level	<b>Tran Level</b>	R:TLV value	"RES:TLEV value"	same as main level
*Set Triggered Level			"RES:TRIG value"	same as main level
<b>Constant Voltage</b>				
Set Main Level	<b>VOLT</b>	VOLT value	"VOLT value"	0 to 60 V
Set Slew Rate	(shift) <b>Slew</b>	V:SLW value	"VOLT:SLEW value"	0.001 to 0.5 (V/ $\mu$ s)
Set Transient Level	<b>Tran Level</b>	V:TLV value	"VOLT:TLEV value"	same as main level
*Set Triggered Level			"VOLT:TRIG value"	same as main level
<b>Transient Operation</b>				
Set Frequency	<b>Freq</b>	FREQ value	"TRAN:FREQ value"	0.25 Hz to 10 kHz
Set Duty Cycle	(shift) <b>Dcycle</b>	DCYCLE value	"TRAN:DCYC value"	3-97% (0.25 Hz-1 kHz) 6-94% (1 kHz-10 kHz)
*Set Pulse Width			"TRAN:TWID value"	0.00005 to 4 s
<b>Trigger Operation</b>				
*Set Trigger Period			"TRIG:TIM value"	0.000008 to 4 s
<b>Current Protection</b>				
*Set Current Level			"CURR:PROT value"	0 to 61.2 A
*Set Delay Time			"CURR:PROT:DEL value"	0 to 60 s
* Can only be programmed remotely via the HP-IB.				

Table 60502-3. Factory Default Settings

Function	Setting	Function	Setting
CURR level	0 A	Mode (CC, CR, CV)	CC
CURR transient level	0 A	Input (on/off)	on
*CURR slew rate	1 A/ $\mu$ s	Short (on/off)	off
CURR range	60 A	Transient operation (on/off)	off
**CURR protection (on/off)	off	***TRAN mode	continuous
**CURR protection level	61.2 A	(continuous, pulse, toggle)	
**CURR protection delay	15 s	TRAN frequency	1 kHz
RES level	1 k $\Omega$	TRAN duty cycle	50%
RES transient level	1 k $\Omega$	**TRAN pulse width	0.5 ms
RES range	1 k $\Omega$	**TRIG source	hold
VOLT level	60 V	(bus, external, hold, timer, line)	
VOLT transient level	60 V	**TRIG period	0.001 s
VOLT slew rate	5 V/ $\mu$ s	**PORT0 output (on/off)	off (logic 0)
		**CAL mode (on/off)	off

\* The \*RST command resets the CURR slew rate to 5 A/ $\mu$ s, not to the factory default.

\*\* Can only be programmed remotely via the HP-IB.

\*\*\* Continuous transient mode is the only mode available at the front panel. Pulsed, toggled, and continuous modes can all be programmed remotely via the HP-IB.

Table 60502-4. Calibration Information

Ranges and Calibration Points	Variables	Variable Values	Power Supply Settings	Current Shunt
High Current Range	Hi_curr_rng	60	5 V/61 A	100 A
High Current Hi point	Hi_curr_hipt	54		
High Current Lo point	Hi_curr_lopt	1.2		
Low Current Range	Lo_curr_rng	6	5 V/10 A	10 A
Low Current Hi point	Lo_curr_hipt	5.4		
Low Current Lo point	Lo_curr_lopt	.12		
Voltage Range	N/A	N/A	61 V/5 A	N/A
Voltage Hi point	Volt_hipt	54		
Voltage Lo point	Volt_lopt	3		
Low Resistance Range	Lo_res_rng	1	15 V/10.9 A	10 A
Low Resistance Hi point	Lo_res_hipt	1		
Low Resistance Lo point	Lo_res_lopt	.033		
Middle Resistance Range	Mid_res_rng	10	10.9 V/15 A	10 A
Middle Resistance Hi point	Mid_res_hipt	30		
Middle Resistance Lo point	Mid_res_lopt	1		
High Resistance Range	Hi_res_rng	1001	60 V/6 A	10 A
High Resistance Hi point	Hi_res_hipt	120		
High Resistance Lo point	Hi_res_lopt	12		

60502-90001

